




Light & General Duty Casters



PNEUMATIC
WHEEL
CASTERS

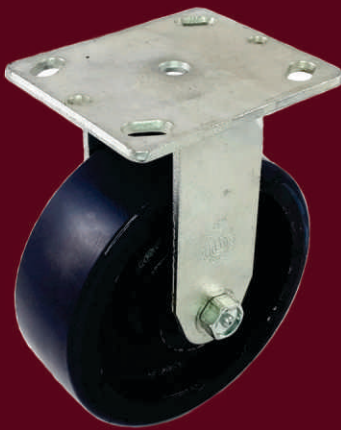

LEVELLING
CASTERS



HI-TEMPERATURE
CASTERS



LIGHT,
&
GENERAL DUTY
CASTERS



*Your source
for the best quality
and best price casters.*



PLASTIC TWIN WHEEL CASTERS

These twin nylon wheel casters are ideal for a wide variety of home and office uses. An assortment of mounting options are available to suit any application. Optional pedal brake available.

Model Number	Wheel Size	Type of Mount	Capacity	Additional Details
CCTW30PLTP	30mm	Top Plate	40 lbs	
GSTDK229 T516	37mm	5/16" x 5/8" Thread	40 lbs	Non-Hood
GSTDKF229 T516	37mm	5/16" x 5/8" Thread	40 lbs	Non-Hood, Brake
CCTW40PLTP	40mm	Top Plate	40 lbs	
CCTW40PLTPBR	40mm	Top Plate	40 lbs	Brake
CCTW40PLWS	40mm	Wood Stem	40 lbs	
CCTW40PLWSBR	40mm	Wood Stem	40 lbs	Brake
CCTW40PLUB	40mm	5/8" U-Bracket	40 lbs	
CCTW50PLTP	50mm	Top Plate	75 lbs	
CCTW50PLTPBR	50mm	Top Plate	75 lbs	Brake
CCTW50PLFR716X1	50mm	7/16" x 1" Friction Ring Stem	75 lbs	
CCTW50PLFR716X78 B	50mm	7/16" Friction Ring Stem	75 lbs	
CCTW50URFR716X78 B	50mm	7/16" Friction Ring Stem	75 lbs	Urethane
CCTW50PLFR716X1BR	50mm	7/16" x 1" Friction Ring Stem	75 lbs	Brake
CCTW50PLFR716 BLOFF	50mm	7/16" Friction Ring Stem	75 lbs	Sit down to unlock
CCTW50PLFR716 BLON	50mm	7/16" Friction Ring Stem	75 lbs	Sit down to lock
CCTW50PLTS14X34	50mm	1/4" Threaded Stem	75 lbs	
CCTW50PLTS14X34BR	50mm	1/4" Threaded Stem	75 lbs	Brake
CCTW50PLTS38X34	50mm	3/8" Threaded Stem	75 lbs	
CCTW50PLTS38X34BR	50mm	3/8" Threaded Stem	75 lbs	Brake
CCTW50PLTS516X34	50mm	5/16" Threaded Stem	75 lbs	
CCTW50PLTS516X34BR	50mm	5/16" Threaded Stem	75 lbs	Brake
CCTW50PLWS	50mm	Wood Stem	75 lbs	
CCTW50PLWSBR	50mm	Wood Stem	75 lbs	Brake

Helpful Hint...

Since all twin wheeled casters look alike, when selecting one it is best to bring a sample into a Caster Town location so we can match the one that you need. You must bring in both the body and stem as stems are not interchangeable from one manufacturer to another. For office chairs the 7/16" Friction Ring Stem is most common.

EUROPEAN TWIN WHEEL CASTERS

Designed for our customers who use metric sizes, these German made twin-wheel casters can be mixed and matched with the stem types below to fit your needs.



GSUKF96 24B
(GSS10 FTP)



GSUKF96 24B
(GSS10 FR10X22)

Model Number	Wheel Size	Capacity	Additional Details
GSUK97 24B	50mm	75 lbs	Black, hooded, soft
GSUKF96 24B	50mm	75 lbs	Black, hooded, soft, brake
GSSUK132 24B	55mm	120 lbs	Black, steelcase, non-hood soft

STEM OPTIONS

Plate style	-	GSS10 FTP	-	38mm x 38mm
Threaded Stem	-	GSS10 T10X15	-	10mm x 15mm
Threaded Stem	-	GSS10 T8X15	-	8mm x 15mm
Threaded Stem	-	GSS10 T12X15	-	12mm x 15mm
Threaded Stem	-	GSS10 T14X1	-	1/4" x 1"
Threaded Stem	-	GSS10 T516X1	-	5/16" x 1"
Threaded Stem	-	GSS10 T38X1	-	3/8" x 1"
Friction Ring Stem	-	GSS10 SC10X22	-	10mm x 22mm
Friction Ring Stem	-	GSS10 SC38X1	-	3/8" x 22mm
Friction Ring Stem	-	GSS10 SC716x78	-	7/16" x 7/8"


Friction Ring



Threaded



Plate





SHPA50000BC U



SHPA50000FB U

"PACER" SERIES TWIN WHEEL CASTERS

These hooded die-cast twin wheel casters offer different finishes with an assortment of mounting stems. They also have optional urethane wheels to help prevent floors from getting scratched.

Model Number	Wheel Size	Wheel Material	Capacity	Colour
SHPA50000FB U	50mm	Polyurethane	75 lbs	Flat Black
SHPA50000BC U	50mm	Polyurethane	75 lbs	Bright Chrome
SHPA50000BR U	50mm	Polyurethane	75 lbs	Brass Plate
SHPA60000FB U	60mm	Polyurethane	100 lbs	Flat Black
SHPA60000BC U	60mm	Polyurethane	100 lbs	Bright Chrome
SHPA60000BR U	60mm	Polyurethane	100 lbs	Brass Plate

STEM OPTIONS

Wheel	Part #	Stem Type	Size
50mm	SHSE 101	Plate	1-1/2" x 1-1/2" Square Plate
	SHSE 223	Friction Ring	7/16" x 7x8"
	SHSE 605	Threaded	3/8" x 3/4" UNC
60mm	SHPL 101	Plate	1-1/2" x 1-1/2" Square Plate
	SHPL 302	Wood	5/16" x 1-1/2"
	SHPL 525	Threaded	5/16" x 1-1/2" UNC

Many more stem sizes and styles available

CCBC FTPB



CCBC WS



HOODED BALL CASTERS

These rugged ball casters are an attractive compliment to any piece of office furniture or home application. The unique wide-tread design gives maximum mobility and carpet protection. Not suitable for wood or tile flooring.

Model Number	Wheel Size	Type of Mount	Capacity	Additional Details
CCBC FTP	50mm	Full Top Plate	75 lbs	Chrome
CCBC FTPB	50mm	Full Top Plate	75 lbs	Brass
CCBC FR	50mm	7/16" Friction Ring	75 lbs	Chrome
CCBC FR1B	50mm	7/16" x 1" Friction Ring	75 lbs	Brass
CCBC TS516	50mm	5/16" x 1" Threaded	75 lbs	Chrome
CCBC TS516B	50mm	5/16" x 1" Threaded	75 lbs	Brass
CCBC WS	50mm	Wood Stem	75 lbs	Chrome
CCBC WSB	50mm	Wood Stem	75 lbs	Brass

SHUT100000BK U



SHUT100000BK U B




"Ultima" SERIES TWIN WHEEL CASTERS

Shepherd Ultima series hoodless twin wheel casters. All nylon construction. Steel axle and fastening. These casters come with Urethane wheels to provide best non-marking protection for all floor surfaces and help provide a quiet smooth roll. There are a variety of sturdy mounting stems found below.

Model Number	Wheel Size	Capacity	Additional Details
SHUT60000BK U	60mm	100 lbs	Black, non-hooded
SHUT75000BK U	75mm	165 lbs	Black, non-hooded
SHUT75000BK U B	75mm	165 lbs	Black, non-hooded, brake
SHUT100000BK U	100mm	175 lbs	Black, non-hooded
SHUT100000BK U B	100mm	175 lbs	Black, non-hooded, brake

STEM OPTIONS

Wheel Size	Part #	Size
50mm - 60mm	SHUT56 223	- 7/16" x 7/8" Friction Ring
	SHUT75 101	- 1-1/2" x 1-1/2" Plate 1x 1" Bolt Hole
	SHUT75 116	- 2-9/16 x 2-3/16" Plate 2x 1-5/8" Bolt Holes
100mm	SHUT75 223	- 7/16" x 7/8" Friction Ring
	SHUT75 637	- 3/8" x 3/4" UNC Threaded Stem
	SHUT100 211	- 7/16" x 1-7/16" Friction Ring
	SHUT100 116	- 2-9/16" x 2-3/16" Plate 2x 1-5/8" Bolt Holes
	SHUT100 637	- 3/8" x 3/4" UNC Threaded

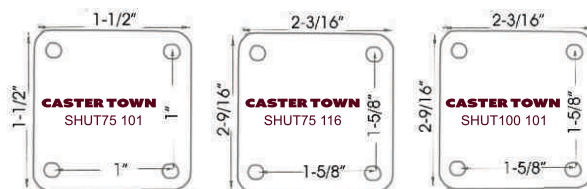



LC SERIES 125 lbs

Light duty, zinc-plated casters with a urethane wheel. Ideal for light loads and where height limitations are a factor. Available in a variety of mounting types. Rigid casters available only with a top plate mounting style.

CCLC2078URSLPSB

CCLC3078URSTS38X1.5SB

Model Number	Wheel Size	Overall Height	Type of Mount	Capacity	Brake?	Swivel/Rigid
CCLC2078URSLP	2"	2-5/8"	Large Top Plate	125 lbs	-	Swivel
CCLC2078URSLPSB	2"	2-5/8"	Large Top Plate	125 lbs	Yes	Swivel
CCLC2078URRLP	2"	2-5/8"	Large Top Plate	125 lbs	-	Rigid
CCLC2078URSSP	2"	2-5/8"	Small Top Plate	125 lbs	-	Swivel
CCLC2078URSSPSB	2"	2-5/8"	Small Top Plate	125 lbs	Yes	Swivel
CCLC2078URFR	2"	2-5/8"	7/16" x 1 3/8" Friction Ring	125 lbs	-	Swivel
CCLC2078URFR1	2"	2-5/8"	7/16" x 1" Friction Ring	125 lbs	-	Swivel
CCLC2078URFRSB	2"	2-5/8"	1-3/8" Friction Ring	125 lbs	Yes	Swivel
CCLC2078URSTS38X1	2"	2-5/8"	3/8" x 1" Threaded Stem	125 lbs	-	Swivel
CCLC2078URSTS38X1SB	2"	2-5/8"	3/8" x 1" Threaded Stem	125 lbs	Yes	Swivel
CCLC2078URSTS38X1.5	2"	2-5/8"	3/8" x 1-1/2" Threaded Stem	125 lbs	-	Swivel
CCLC2078URSTS38X1.5SB	2"	2-5/8"	3/8" x 1-1/2" Threaded Stem	125 lbs	Yes	Swivel
CCLC2078URSTS516	2"	2-5/8"	5/16" x 1" Threaded Stem	125 lbs	-	Swivel
CCLC2078URSTS516SB	2"	2-5/8"	5/16" x 1" Threaded Stem	125 lbs	Yes	Swivel
CCLC2078URSWS	2"	2-5/8"	5/16" Wood stem	125 lbs	-	Swivel
CCLC2078URSWSSB	2"	2-5/8"	5/16" Wood stem	125 lbs	Yes	Swivel
CCLC2578URSLP	2.5"	3-1/8"	Large Top Plate	125 lbs	-	Swivel
CCLC2578URSLPSB	2.5"	3-1/8"	Large Top Plate	125 lbs	Yes	Swivel
CCLC2578URRLP	2.5"	3-1/8"	Large Top Plate	125 lbs	-	Rigid
CCLC2578URSSP	2.5"	3-1/8"	Small Top Plate	125 lbs	-	Swivel
CCLC2578URSSPSB	2.5"	3-1/8"	Small Top Plate	125 lbs	Yes	Swivel
CCLC2578URFR	2.5"	3-1/8"	7/16" Friction Ring	125 lbs	-	Swivel
CCLC2578URFRSB	2.5"	3-1/8"	7/16" Friction Ring	125 lbs	Yes	Swivel
CCLC2578URSTS38X1	2.5"	3-1/8"	3/8" x 1" Threaded Stem	125 lbs	-	Swivel
CCLC2578URSTS38X1SB	2.5"	3-1/8"	3/8" x 1" Threaded Stem	125 lbs	Yes	Swivel
CCLC2578URSTS38X1.5	2.5"	3-1/8"	3/8" x 1.5" Threaded Stem	125 lbs	-	Swivel
CCLC2578URSTS38X1.5SB	2.5"	3-1/8"	3/8" x 1.5" Threaded Stem	125 lbs	Yes	Swivel
CCLC2578URSTS516	2.5"	3-1/8"	5/16" x 1" Threaded Stem	125 lbs	-	Swivel
CCLC2578URSTS516SB	2.5"	3-1/8"	5/16" Threaded Stem	125 lbs	Yes	Swivel
CCLC2578URSWS	2.5"	3-1/8"	5/16" Wood stem	125 lbs	-	Swivel
CCLC2578URSWSSB	2.5"	3-1/8"	5/16" Wood stem	125 lbs	Yes	Swivel
CCLC3078URSLP	3"	3-11/16"	Large Top Plate	125 lbs	-	Swivel
CCLC3078URSLPSB	3"	3-11/16"	Large Top Plate	125 lbs	Yes	Swivel
CCLC3078URRLP	3"	3-11/16"	Large Top Plate	125 lbs	-	Rigid
CCLC3078URFR	3"	3-11/16"	7/16" Friction Ring	125 lbs	-	Swivel
CCLC3078URFRSB	3"	3-11/16"	7/16" Friction Ring	125 lbs	Yes	Swivel
CCLC3078URSTS38X1.5	3"	3-11/16"	3/8 x 1.5" Threaded Stem	125 lbs	-	Swivel
CCLC3078URSTS38X1.5SB	3"	3-11/16"	3/8 x 1.5" Threaded Stem	125 lbs	Yes	Swivel
CCLC3078URSTS38X1	3"	3-11/16"	3/8 x 1" Threaded Stem	125 lbs	-	Swivel
CCLC3078URSTS38X1SB	3"	3-11/16"	3/8 x 1" Threaded Stem	125 lbs	Yes	Swivel
CCLC3078URSWS	3"	3-11/16"	5/16" Wood Stem	125 lbs	-	Swivel
CCLC3078URSWSSB	3"	3-11/16"	5/16" Wood Stem	125 lbs	Yes	Swivel

LC Series mount types and specifications

Stem & Friction Ring

Threaded Stem

Top Plate

Wood Stem

Large Top Plate (LP): 1-1/2" x 2-1/2" Mounting holes: 1" x 2-1/8"
Small Top Plate (SP): 1-3/16" x 2" Mounting Holes: 13/16" x 1-9/16"

Threaded Stem (TS): 5/16"-18 x 1" or 3/8"-16 x 1"
Friction Ring Stem (FR): 7/16" x 1-3/8"
Friction Ring Stem (FR1): 7/16" x 1"
Wood Stem (WS): 5/16"



CCEP5125TPSPBTB**CCEP5125UNRPB**

Top Plate: 3-3/4" x 3"
Mounting Holes:
 1-3/4" x 3" Slotted to 2-3/8" x 3-1/8"

EP SERIES 210 - 300 lbs

One of our series unique to Casterland. These casters have a plate style able to cover many different models of casters and come with precision ball bearings in the wheels.

Optional 2-5/8" x 3-3/4" top plate available.
1-3/4" x 2-7/8" mounting holes slotted to 1-3/4" x 3"

Also available in stainless steel.

Model Number	Wheel Size	Overall Height	Type of Wheel	Capacity	Brake?	Swivel/Rigid
CCEP3125TPSPB	3"	4-1/4"	Thermal Plastic Rubber	210 lbs	-	Swivel
CCEP3125TPRPB	3"	4-1/4"	Thermal Plastic Rubber	210 lbs	-	Rigid
CCEP3125TPSPBSB	3"	4-1/4"	Thermal Plastic Rubber	210 lbs	Yes	Swivel
CCEP3125TPSPBTB	3"	4-1/4"	Thermal Plastic Rubber	210 lbs	Total	Swivel
CCEP3125UNSPB	3"	4-1/4"	Urethane/Nylon	250 lbs	-	Swivel
CCEP3125UNRPB	3"	4-1/4"	Urethane/Nylon	250 lbs	-	Rigid
CCEP3125UNSPBSB	3"	4-1/4"	Urethane/Nylon	250 lbs	Yes	Swivel
CCEP3125UNSPBTB	3"	4-1/4"	Urethane/Nylon	250 lbs	Total	Swivel
CCEP4125TPSPB	4"	5-1/4"	Thermal Plastic Rubber	250 lbs	-	Swivel
CCEP4125TPRPB	4"	5-1/4"	Thermal Plastic Rubber	250 lbs	-	Rigid
CCEP4125TPSPBSB	4"	5-1/4"	Thermal Plastic Rubber	250 lbs	Yes	Swivel
CCEP4125TPSPBTB	4"	5-1/4"	Thermal Plastic Rubber	250 lbs	Total	Swivel
CCEP4125UNSPB	4"	5-1/4"	Urethane/Nylon	300 lbs	-	Swivel
CCEP4125UNRPB	4"	5-1/4"	Urethane/Nylon	300 lbs	-	Rigid
CCEP4125UNSPBSB	4"	5-1/4"	Urethane/Nylon	300 lbs	Yes	Swivel
CCEP4125UNSPBTB	4"	5-1/4"	Urethane/Nylon	300 lbs	Total	Swivel
CCEP5125TPSPB	5"	6-1/4"	Thermal Plastic Rubber	300 lbs	-	Swivel
CCEP5125TPRPB	5"	6-1/4"	Thermal Plastic Rubber	300 lbs	-	Rigid
CCEP5125TPSPBSB	5"	6-1/4"	Thermal Plastic Rubber	300 lbs	Yes	Swivel
CCEP5125TPSPBTB	5"	6-1/4"	Thermal Plastic Rubber	300 lbs	Total	Swivel
CCEP5125UNSPB	5"	6-1/4"	Urethane/Nylon	300 lbs	-	Swivel
CCEP5125UNRPB	5"	6-1/4"	Urethane/Nylon	300 lbs	-	Rigid
CCEP5125UNSPBSB	5"	6-1/4"	Urethane/Nylon	300 lbs	Yes	Swivel
CCEP5125UNSPBTB	5"	6-1/4"	Urethane/Nylon	300 lbs	Total	Swivel

MEDIUM HEAVY DUTY 440 - 550 lbs

Part Number	Wheel Size	Weight Capacity	Additional Details
BLLK-PATH 100K-1-FI-FK	100MM X 32MM	440 lbs	Total lock plate caster, thermoplastic wheel, PB
BLLK-PATH 100K-1-FK	100MM X 32MM	440 lbs	Swivel plate caster, thermoplastic wheel, PB
BLBK-PATH 100K-1-FK	100MM X 32MM	440 lbs	Rigid plate caster, thermoplastic wheel, PB
BLLK-PATH 125K-1-FI-FK	125MM X 32MM	550 lbs	Total lock plate caster, thermoplastic wheel, PB
BLLK-PATH 125K-1-FK	125MM X 32MM	550 lbs	Swivel plate caster, thermoplastic wheel, PB
BLBK-PATH 125K-1-FK	125MM X 32MM	550 lbs	Rigid plate caster, thermoplastic wheel, PB

**BLLK-PATH 125K-1-FK****BLLK-PATH 100K-1-FK**



CCMB3125UNSPBB



CCMB5125TPSPBTB

Bolt Hole Clearance: 1/2"
See below for available stems

MB SERIES 300 lbs

Medium duty bolthole caster designed for applications where top plate mounting is impractical. Using the same double ball raceway construction as our MS series, these swivel casters are able to be mounted with a nut & bolt or any of our standard and custom stems listed below.

Also available in stainless steel.

Model Number	Wheel Size	Wheel Type	Overall Height	Capacity	Brake?
CCMB3125TPSPB	3"	Thermal Plastic Rubber	4-1/4"	210 lbs	-
CCMB3125TPSPBSB	3"	Thermal Plastic Rubber	4-1/4"	210 lbs	Yes
CCMB3125TPSPBTB	3"	Thermal Plastic Rubber	4-1/4"	210 lbs	Total
CCMB3125UNSPB	3"	Urethane/Nylon	4-1/4"	250 lbs	-
CCMB3125UNSPBSB	3"	Urethane/Nylon	4-1/4"	250 lbs	Yes
CCMB3125UNSPBTB	3"	Urethane/Nylon	4-1/4"	250 lbs	Total
CCMB4125TPSPB	4"	Thermal Plastic Rubber	5-1/4"	250 lbs	-
CCMB4125TPSPBSB	4"	Thermal Plastic Rubber	5-1/4"	250 lbs	Yes
CCMB4125TPSPBTB	4"	Thermal Plastic Rubber	5-1/4"	250 lbs	Total
CCMB4125UNSPB	4"	Urethane/Nylon	5-1/4"	300 lbs	-
CCMB4125UNSPBSB	4"	Urethane/Nylon	5-1/4"	300 lbs	Yes
CCMB4125UNSPBTB	4"	Urethane/Nylon	5-1/4"	300 lbs	Total
CCMB5125TPSPB	5"	Thermal Plastic Rubber	6-1/4"	300 lbs	-
CCMB5125TPSPBSB	5"	Thermal Plastic Rubber	6-1/4"	300 lbs	Yes
CCMB5125TPSPBTB	5"	Thermal Plastic Rubber	6-1/4"	300 lbs	Total
CCMB5125UNSPB	5"	Urethane/Nylon	6-1/4"	300 lbs	-
CCMB5125UNSPBSB	5"	Urethane/Nylon	6-1/4"	300 lbs	Yes
CCMB5125UNSPBTB	5"	Urethane/Nylon	6-1/4"	300 lbs	Total

Stem Options

(All sizes measured using the inside dimension of the hole)

Expanding Inserts

Round		Square	
Model Number	O.D.	Model Number	O.D.
CAEXR34	3/4"	CAEXS34	3/4"
CAEXR78	7/8"	CAEXS78	7/8"
CAEXR118	1-1/8"	CAEXS1	1"
CAEXR114	1-1/4"	CAEXS138	1-3/8"
CAEXR138	1-3/8"	CAEXS112	1-1/2"
CAEXR112	1-1/2"		



Threaded Stems

Model Number	Threading Size	Length
CATS12X112	1/2"	1-1/2"
CATS58X2	5/8"	2"
CATS34X2	3/4"	2"
CAPT34X1	Pipe Thread	1"
CATS716X112	7/16"	1-1/2"



Round Friction Ring Stems

Model Number	Stem Diameter	Length
CAFR1316X2	13/16"	2"
CAFR1X2316	1"	2"
CAFR34X2	3/4"	1-3/4"
CAFR58X2316	5/8"	2-3/16"
CAFR716X1316	7/16"	1-3/8"
CAFR78X178	7/8"	2"
CAFR845X212	0.845	2-1/2"



Round Stems

Model Number	Stem Diameter	Length
CARD1X2	1"	2"
CARD78X10	7/8"	10"
CARD78X2	7/8"	2"
CARD34X2	3/4"	2"



Square Stems

Model Number	Stem Dimension	Length
CASQ34X2	3/4"	2"
CASQ78X2	7/8"	2"
CASQ916X21516	9/16"	2-15/16"





CCBP6200UCRRB



CCBP8200RMSRB

Top Plate: See below for options
Mounting Holes: See below for options

BP SERIES 600 - 1000 lbs

This 2" wide caster is designed for easy swivelling and to take the abuse of rough, continuous service. It is constructed with a superior 5/8" nut and bolt kingpin with double ball raceways.

This caster is zinc plated for lasting wear and features a grease fitting in the swivel head for easy maintenance.

Also available in stainless steel.

Model Number	Wheel Size	Type of Wheel	Overall Height	Capacity	Swivel/Rigid
CCBP3200UCRRB	3-1/4"	Urethane on Cast	4-1/2"	600 lbs	Swivel
CCBP3200UCSRB	3-1/4"	Urethane on Cast	4-1/2"	600 lbs	Swivel
CCBP3200PHRRB	3-1/4"	Phenolic	4-1/2"	700 lbs	Rigid
CCBP3200PHSRB	3-1/4"	Phenolic	4-1/2"	700 lbs	Swivel
CCBP4200RMRRB	4"	Rubber Moldon	5-5/8"	700 lbs	Swivel
CCBP4200RMSRB	4"	Rubber Moldon	5-5/8"	700 lbs	Rigid
CCBP4200UCRRB	4"	Urethane on Cast	5-5/8"	700 lbs	Swivel
CCBP4200UCSRB	4"	Urethane on Cast	5-5/8"	800 lbs	Swivel
CCBP4200PHRRB	4"	Phenolic	5-5/8"	800 lbs	Rigid
CCBP4200PHSRB	4"	Phenolic	5-5/8"	800 lbs	Swivel
CCBP5200RMRRB	5"	Rubber Moldon	6-1/2"	900 lbs	Swivel
CCBP5200RMSRB	5"	Rubber Moldon	6-1/2"	900 lbs	Rigid
CCBP5200UCRRB	5"	Urethane on Cast	6-1/2"	900 lbs	Swivel
CCBP5200UCSRB	5"	Urethane on Cast	6-1/2"	900 lbs	Swivel
CCBP5200PHRRB	5"	Phenolic	6-1/2"	900 lbs	Rigid
CCBP5200PHSRB	5"	Phenolic	6-1/2"	900 lbs	Swivel
CCBP6200RMRRB	6"	Rubber Moldon	7-1/2"	900 lbs	Swivel
CCBP6200RMSRB	6"	Rubber Moldon	7-1/2"	900 lbs	Rigid
CCBP6200UCRRB	6"	Urethane on Cast	7-1/2"	900 lbs	Swivel
CCBP6200UCSRB	6"	Urethane on Cast	7-1/2"	900 lbs	Swivel
CCBP6200PHRRB	6"	Phenolic	7-1/2"	900 lbs	Rigid
CCBP6200PHSRB	6"	Phenolic	7-1/2"	900 lbs	Swivel
CCBP8200RMRRB	8"	Rubber Moldon	9-1/2"	1000 lbs	Swivel
CCBP8200RMSRB	8"	Rubber Moldon	9-1/2"	1000 lbs	Rigid
CCBP8200UCRRB	8"	Urethane on Cast	9-1/2"	1000 lbs	Swivel
CCBP8200UCSRB	8"	Urethane on Cast	9-1/2"	1000 lbs	Swivel
CCBP8200PHRRB	8"	Phenolic	9-1/2"	1000 lbs	Rigid
CCBP8200PHSRB	8"	Phenolic	9-1/2"	1000 lbs	Swivel

For Side Brakes add "SB" at the end of the model number - eg. CCBP4200RMSRB

For Total Brakes add "TB" at the end of the model number - eg. CCBP4200RMSRB

Locking Information

Side Brake (SB)

Stops the wheel from rolling.


Total Brake (TB)

Stops both the wheel and swivel from moving.



Helpful Hint...

To ensure correct bolt hole spacing, measure from the center of one hole to the center of the next.

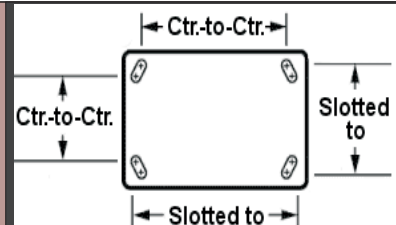

Locking Options

Side Brake (SB)



CCBP6200RMSRBSB

Total Brake (TB)




CCBP6200UCSRBTB


Floor Lock



CAFL 6

Floor Locks are mounted separately from the casters for an even better braking option.

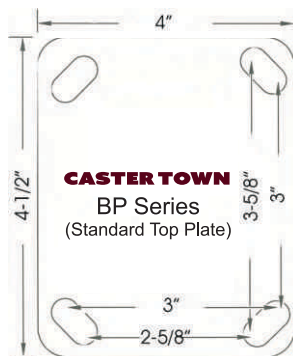

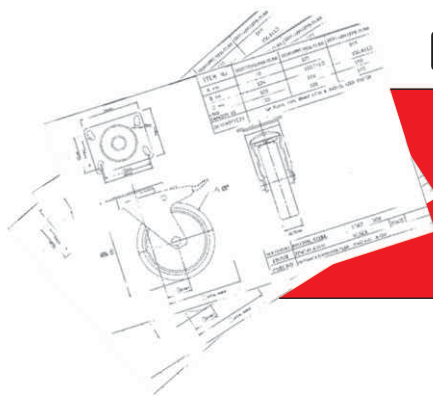


If it can be done, we can do it!

Looking for something different for a unique application? Or one of our normal series with a different wheel type, size or option? Let us know!

Unique Stem Sizes

Part Number	Wheel Size	Weight Capacity	Stem Size	
DCLH 625 CI	2.5"	400 lbs	1/2" TS	 DCLN 625 CI
DCLN 625 CI	2.5"	400 lbs	5/8" TS	
DCLR 625 CI	2.5"	400 lbs	3/4" TS	



Floor Locks

Floor locks available in a variety of sizes to ensure rigidity in the most mobile of circumstances.

Pallet Jack Wheels



Ball Transfers

Require something to be moved easily in any direction? Many threaded stem and plate style models available.



DC31 SL404 PSEL

Model Number	Wheel Size	Capacity	Additional Details
DC31 SL404 PSE	4"	900 lbs	Swivel, spring loaded

Many sizes and materials of wheels available, please contact us for details!



Levelling Casters

Part Number	Wheel Size	Weight Capacity	
DRLV0300V4	3"	600 lbs	
DRLV0600V4	3"	1,300 lbs	

LV Series leveling casters have a die-cast aluminum frame with a steel swivel head, an internal leveling mechanism and dial, and a rubber foot pad. The foot pad can be adjusted to a level position and make the attached equipment completely stationary. A cast aluminum frame is powder coated in an ivory hue and the wheels are made of an ultra-strong, non-marking nylon.



Hilman Rollers

Designed to move a lot of weight quickly and easily. Up to 400 tons weight capacity with a low overall height.

Short But Tough Casters

Part Number	Wheel Size	Weight Capacity	Additional Details
BLLPA-VSTH-35K	35MM X 27MM	220 lbs	Swivel plate caster, urethane wheel, PB
BLLRA-VSTH-35K	35MM X 27MM	220 lbs	Swivel bolt hole caster, urethane wheel, PB
BLVSTH 35/6K (wheel only)	35MM X 27MM, 6MM	220 lbs	Yellow extrathane on cast iron core PB

BLLPA-VSTH-35K



BLLRA-VSTH-35K



BLVSTH 35/6K



CASTER WHEELS


What makes one wheel better than the other? How you use it is the best answer. A hard wheel has less "rolling resistance" and as a result may be easier to push or pull. However, a softer wheel glides over debris easier and is less likely to damage floors. A choice that is in the middle is Urethane on Nylon (UN). There are also other determining factors and choices in wheels like; chemical conditions, wet environments, food workplace. Even bearing options are important factors when choosing a wheel. Speak with one of our staff to help you make the best choice!


	Hi Temp (HT) <p>A wide selection of High Temperature wheels made in a variety of ways are available. These are generally best suited for dry heat applications such as powder coating, bakery ovens and autoclaves. Capability ranges are up to 475° F for 30 minutes. Soft versions are an option as well.</p>		Thermal Plastic Rubber (TP) <p>New generation grey non-marking wheel bonded to thermoplastic core. Soft tread but high weight capacities. Clean running wheel with good chemical, oil, and acid resistance.</p>
	Neoprene (XD) <p>These quiet and easy rolling wheels are good for all floor surfaces. Wear and oil resistant. Shock absorbing, non-marking. Will reject floor debris such as screws, metal filings and glass.</p>		Rubber Moldon (RM) <p>Black solid cushion rubber tire bonded to cast steel wheel center. Provides an economical, quiet rolling wheel.</p>
	Solid Elastomer (PSE) <p>Quiet solid elastomer wheel. Ergonomically designed for medium loads (300-1800lbs). Excellent mobility and shock absorption. Ideal for continuous use and tow-lines. Tolerant of a wide range of chemicals.</p>		Urethane on Cast <p>Polyurethane formed on cast center. Good oil, chemical, and acid resistance. Will not take a compression set, and provides load ratings similar to steel wheels.</p>
	Phenolic (PH) <p>Fibre filled impregnated with phenolic resin and molded with extreme heat and pressure. Provides a hard smooth wheel with good corrosion resistance. High temperature (HT) available. Laminated Phenolic (LAM) available for better wear.</p>		Swivel-EAZ (EZ) <p>Carries twice the load of standard size wheels. Maintenance free for longer life. Non-marking high performance elastomer treads.</p>
	Ductile Iron (DU) <p>Heavy duty wheels for severe loads. Very resistant to breaking, cracking and chipping. Also referred to as malleable iron. Loads are distributed across the entire wheel for maximum floor protection. protection.</p>		Urethane on Nylon (UN) <p>Polyurethane tread bonded to a polypropylene core for high strength and light weight. Non marking wheel designed to meet the stringent requirements of clinical environments.</p>
	V-Groove (VG) <p>Made from Cast steel, these wheels are great for running along a piece of inverted angle iron or tubing as a guide. The load must still rest on the flat of the wheel tread. Ductile Iron (VG-DU) available.</p>		PolyFlexon (UA) <p>PolyFlexon wheel offers a semi-cushioned ride and is non-marking. Great for tow-line applications. Requires less effort to start-up and maintain a rolling load. (85A durometer)</p>
	Flanged Wheel (FL) <p>Cast Steel or Ductile Iron wheel designed to operate on a steel track. This wheel minimizes rolling effort and aids guidance Superior wear factor to V-Groove wheels Excellent for use on boat cradles and similar tracked applications.</p>		Reinforced Thermoplastic (RT) <p>High performance, durable and cost effective wheel generally suited for food processing, tool storage, sanitary maintenance and applications requiring heavy loads. High temperature (HT) available.</p>


Please note: Not all wheel sizes or bearings types are available in all wheel materials. Some materials are better suited for certain applications than others. Product may not be exactly as pictured.

***Replacement parts for most casters, including bearings, bolts, and seals, are also available.**


Hi- Temperature

	Model Number	Wheel Size	Capacity	Wheel Type	Bolt Spacing	
	CCEP4150FVSPB STP	CCNP4150FVSPB	4" x 1.5"	275 lbs	Green Epoxy Resin	1-3/4" x 2-7/8"
		CCNP4150HTSRB	4" x 1.5"	350 lbs	Pnenolic	1-3/4" x 2-7/8"
		BCHK4150HTRB	4" x 1.5"	400 lbs	Phenolic	3" x 4"
		FAA465W HT 4X112	4" x 1.5"	400 lbs	Glass-filled Nylon	3-13/32" x 2-3/8"
		CCEP4150FVSPB	4" X1.5"	500 lbs	Green Epoxy Resin	2-1/4" x 3"
		CCEP4150FVSPB STP	4" X 1.5"	500 lbs	Green Epoxy Resin	3" x 3"
		CCBP4150FVSPB	4" X 1.5"	700 lbs	Green Epoxy Resin	3" x 3"
		CCBP4150FVSPB				

Model Number	Wheel Size	Capacity	Additional Details	Piano
FAEP759 2	Dual 2"	275 lbs	Plate, hard rubber (soft also avail.)	
FAEW759 2	Dual 2"	275 lbs	C-clip, hard rubber (soft also avail.)	
DCOC 32 XD	Dual 2"	300 lbs	C-clip, neoprene	
HWW98 Wood	-	-	Piano caster socket for woodclip	
HWW98	-	-	Piano caster socket for c-clip	

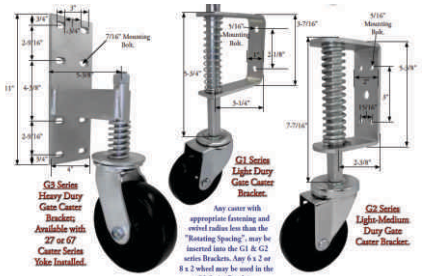Ladder/Gate	Model Number	Capacity
	G1 Series (SH9798)	(75-100 lbs range)
	G2 Series (BCDC3)	(100-150 lbs range)
	G3 Series (BCGC6200RMCRB)	(180-700 lbs range)
<p>These series are designed specifically for use on gates and sliding or rotating doors and provides a shock absorbing ride over uneven ground; the compression spring helps support the weight of the gate/door to assist in keeping it on an even or level plain.</p>		

Model Number	Additional Details	Bed
SHBR2204WD	3/8" wood stem roller, (brake available)	
SHBG2204WD	3/8" wood stem glide	
SH9532	Adjustable to 10", 2/pkg, soft tread thermoplastic rubber	
SH3696	2-1/4" Slip n' grip woodgrain cups for bed casters, 4/pkg	
SH9518	2 bed rollers 54mm, soft tread, TPR wheel, 125lbs	
SHBG254P	Plastic bed glide, adds 2-1/2" height	
SHBG2204WD	Bed glide, 3/8" wood stem	
Many more options available in our Glides & Chair Accessories catalog! see back page for details.		

Creepers	Model Number	Wheel Size	Capacity	Additional Details
	FAEY9C511	2-1/2"	80 lbs	Urethane/Nylon, 5/16" Threaded
	BCCCS300	3"	150 lbs	Steel wheel
	HWJCN 516	-	-	Connector, 5/16" connection nut

Floor Cleaning



CO2 2689 52

DCCLA61675A

Model Number	Wheel Size	Capacity	Additional Details
CO2 2689 52	2-1/2"	175 lbs	Lo-pro, swivel, polypropylene
DCCLA61675A	4"	400 lbs	Small plate, swivel, custom made
DCW404PSE	4"	1000 lbs	Elastomer (wheel only)
ALW800UG 38	2-7/8"	100 lbs	Grey urethane, 3/8" x 1" hub length

Appliances

Model Number

Additional Details

SH9441
SH9601

Dual wheel appliance caster 5/16" threaded stem
Fridge roller system



SH9441

Scaffolds



FAK421 5RB

AGS08908-SCMR-RB

Model Number	Wheel Size	Capacity	Stem Size	Additional Details
FAK421 5RB	5"	115 lbs	1" round	Rubber, brake
BCSC5150MP 125SQ	5"	300 lbs	1-1/4" square	1-1/4" square stem, rubber
AGS08908-SCMR-RB	8"	500 lbs	1-3/8" round	Rubber, brake

Office

Model Number

Wheel Size

Type of Mount

Capacity

Additional Details

DCOB E2 XD
SHOM30223VPR33
CCTW50URFR716X78 B
GSF36BG

2" 7/16" x 13/16" C-Clip
3" 7/16" x 7/8" C-Clip
50mm 7/16" x 7/8" C-Clip
- Requires GSS10 Stem

75 lbs
120 lbs
75 lbs
-
Neoprene
Chemical resistant 'Vipor' wheel
Twin wheel, Urethane barrel
2-1/8" x 2-3/8" black chair base glide

Chair Glide



Many more options available on pages 1 & 2!

DCOB E2 XD



Misc.

Model Number

Wheel Size

Capacity

Additional Details



SH9442

FA156

SH9299	1"	200 lbs	Three wheel swivel dolly 6" diameter
SH9442	2"	300 lbs	Three wheel swivel dolly 12" diameter
FA156	5/8"	110 lbs	Nylon, Rigid
ALS4125 PLY	1-1/4"	40 lbs	Swivel
ALR4125 PLY	1-1/4"	40 lbs	Rigid



CCPN8R



CCPN8S

PNEUMATIC CASTERS 8" - 16"

Top Plate: 4" x 4-1/2" **Mounting Holes:** 2-3/8" x 3-5/8" slotted to 3" x 3"

These casters are ideal when used for maneuvering over rough surfaces, shock situations (i.e. delicate instruments etc.) or anywhere that requires a smooth quiet operation of a wheeled unit.

Model Number	Wheel Size	Overall Height	Capacity	Brake?	Swivel/Rigid
CCPN8SWS	8"	9.75"	250 lbs	-	Swivel
CCPN8SWSSB	8"	9.75"	250 lbs	Yes	Swivel
CCPN8SWR	8"	9.75"	250 lbs	-	Rigid
CCPN10SWS	10"	12-3/16"	350 lbs	-	Swivel
CCPN10SWSSB	10"	12-3/16"	350 lbs	Yes	Swivel
CCPN10SWR	10"	12-3/16"	350 lbs	-	Rigid
CCPN12SWS	12"	15.75"	350 lbs	-	Swivel
CCPN12SWR	12"	15.75"	350 lbs	-	Rigid
CCPN16SWS	16"	19"	500 lbs	-	Swivel
CCPN16SWR	16"	19"	500 lbs	-	Rigid

4 Position Lock is also an option

Caster Replacement Wheels



CWPN10SW3P L BB

Model Number	Wheel Size	Capacity	Hub Length
Pneumatic			
CWPN8L	8"	300 lbs	3.25"
CWPN10SW3P L BB	10"	460 lbs	4"
CWPN12 L BB	12"	460 lbs	4"
CWPN164PNTT BB	16"	590 lbs	4"
Flat Free			
CWPN8FF	8"	300 lbs	2.5"
CWPN8FF OFF	8"	300 lbs	2-1/8"
CWPNFF8L	8"	300 lbs	3.25"
CWPN10FFSW3P	10"	350 lbs	1-7/8"
CWPN10FFSW3P OFF	10"	350 lbs	2-5/16"
CWPN10FF L	10"	350 lbs	4"
CFWA-12-6275-358J	12"	450 lbs	3"
CFWA-12-6275-458J	12"	450 lbs	4"
CWWA-15-83RR	16"	670 lbs	3"
CWWA-15-84RR	16"	670 lbs	4"

Looking for a smooth rolling pneumatic, but concerned about flats?



Flat Free wheels offer the same advantages of pneumatic wheels without the possibility of them going flat. They provide a smooth cushioned ride, rolling easily over debris and small obstacles. A saw-tooth tread design offers a combination of traction and maneuverability. They are also available in casters and are perfect applications for hand trucks, dollies, carts and mobile equipment such as pressure washers, generators, etc.



CWP10SW3P OFF BB



CWP12 BB

Model Number	Wheel Size	Capacity	Hub Length
CWPN8 BB	8"	250 lbs	2.5"
CWPN8OFF BB	8"	250 lbs	2-1/8"
CWPN10SW3P BB	10"	350 lbs	1-7/8"
CWPN10SW3P OFF BB	10"	350 lbs	2-5/16"
CWPN12 BB	12"	460 lbs	3"
CWPN12 OFF BB	12"	495 lbs	2-1/4"
CWPN163PN4TT BB	16"	500 lbs	3"
CWPN164PNTT BB	16"	500 lbs	4"
CWPN164HDPNTT BB	16"	590 lbs	4"

Bearing sizes Available: 1/2", 7/16", 5/8", 3/4" and 20mm

For long-hub and flat free wheel options see page # 11

Pneumatic Wheels

Solid, Semi-Pneumatic and Pneumatic Wheels

Model Number	Wheel Size	Capacity	Additional Details
MA104	5" x 1-1/4"	30 lbs	White, ribbed
MA104 OF	5" x 1-1/4"	30 lbs	White, ribbed, offset
MA615P OF	6" x 1-1/2"	50 lbs	Plastic, diamond tread, offset
MA615 R	6" x 1-1/2"	50 lbs	White, ribbed
MA615 OF R	6" x 1-1/2"	50 lbs	White, ribbed, offset
MA715P OF	7" x 1-1/2"	55 lbs	Plastic, diamond tread
MA715 R	7" x 1-1/2"	55 lbs	White, ribbed
MA715 OF R	7" x 1-1/2"	55 lbs	White, ribbed, offset
MA875P OF	8" x 1 3/4"	60 lbs	Plastic, diamond tread
MA875 R	8" x 1-3/4"	60 lbs	White, ribbed
MA875 58 HD	8" x 1-3/4"	110 lbs	White, ribbed, heavy duty
MA875 58 OF HD	8" x 1-3/4"	110 lbs	White, ribbed, heavy duty, offset
DRSN80CO52	8" x 2-3/8"	300 lbs	Rubber, poly, offset
CSPH8175UNPBB	8" x 1-3/4"	600 lbs	Urethane, nylon
MAZP83GW 251	8" x 2-1/2"	145 lbs	Silver, ribbed
MAZP83GW 21	8" x 2-1/2"	145 lbs	Silver, ribbed, offset
MA110P	10" x 1-3/4"	80 lbs	Plastic, ribbed
MA110	10" x 1-3/4"	80 lbs	White, ribbed
MA110 OF	10" x 1-3/4"	80 lbs	White, ribbed, offset
MA110 58 HD	10" x 1-3/4"	150 lbs	White, ribbed, heavy duty
MA110 58 OF HD	10" x 1-3/4"	150 lbs	White, ribbed, heavy duty, offset
DRSN10UO52	10" x 2-3/4"	300 lbs	Cushion rubber poly
DRSN10UO53	10" x 2-3/4"	300 lbs	Cushion rubber poly
MAZP121HD 3C1	12" x 3"	350 lbs	Silver, ribbed, heavy duty
MASPP 12HD 58BB	12" x 3/4"	175 lbs	Plastic, ribbed, spoked
DR14300 P1	14" x 3"	800 lbs	Rubber, poly, heavy duty
MASPP 16PSI 12BB	16" x 3/4"	200 lbs	Plastic, spoked, diamond tread
MASPP 20HD 58BB	20" x 3/4"	200 lbs	Plastic, spoked, diamond tread

Flat free wheels are also available on page # 11



MASP 20PSI 58BB



MA875P OF



DRSN80CO52

Lawnmower Wheels

Model Number	Wheel Size	Additional Details
MAPL5275 CTR	5" x 2-3/4"	3-5/16" centered
MAPL5275 OF	5" x 2-3/4"	2-1/2" offset
MAPL530 JD	5" x 3"	2-1/2" offset (for John Deere mowers)
MAPL538 JD	5" x 1-3/8"	1/2" bushing (for John Deere mowers)
MAPL638 JD	6" x 1-3/8"	1/2" bushing (for John Deere mowers)



MAPL5275 OF



MAPL538 JD

Square Inserts

Model Number	Size	Gauge (Wall Thickness)
Square Plastic Inserts		
HWRT620SQ	3/4"	16
HWRT650SQ	3/4"	18
HWRT0902SQ	1"	18
HWRT880SQ	1"	14
HWRT1010SQ	1-1/4"	11
HWRT1120SQ	1-1/4"	16
HWRT1150SQ	1-1/4"	18
HWRT1140SQ	1-1/2"	7
Square Steel Inserts		
HWSI SQ1 16GSC	1"	16-18
HWSI SQ125 16GSC	1-1/4"	16-18
HWSI SQ15 16GSC	1-1/2"	16-18
Square Threaded Steel Inserts		
HWSI SQ1 T38	1" (3/8" thread)	16-18
HWSI SQ1 T516	1" (5/16" thread)	16-18
HWSI SQ125 T516	1-1/4" (5/16" thread)	16-18
HWSI SQ1 T14	1" (1/4" thread)	16-18
HWSI SQ15 T38	1-1/2" (3/8" thread)	16-18
HWSI SQ2 T38	2" (3/8" thread)	14-16
HWSI SQ2 T516	2" (5/16" thread)	16-18
HWSI SQ34 T516	3/4" (5/16" thread)	16-18



HWRT1010SQ



HWSI SQ1 16GSC



HWSI RD1 T516

Round Inserts

Model Number	Diameter	Gauge (Wall Thickness)
Round Plastic Inserts		
HWRT120RD	7/8"	18
HWRT123RD	1"	16
HWRT125RD	1"	18
HWRT126RD	1-5/16"	11
HWRT127RD	1-1/4"	16
HWRT1310RD	1-1/2"	13
HWRT1370RD	1-1/2"	16
HWRT1495RD	1-5/8"	16
Round Steel Inserts		
HWSI RD1 16GSC	1"	16-18
HWSI RD125 16GSC	1-1/4"	16-18
HWSI RD2 16GSC	2"	16-18
Round Threaded Steel Inserts		
HWSI RD1 T516	1" (5/16" thread)	16-18
HWSI RD125 T516	1-1/4" (5/16" thread)	16-18
HWSI RD15 T38	1-1/2" (3/8" thread)	16-18
HWSI RD2 T516	2" (5/16" thread)	16-18
HWSI RD1 T38	1" (3/8" thread)	16-18
HWSI RD15 T516	1-1/2" (5/16" Thread)	16-18



HWSS LEG 158

HWSS LEG 158 LR

Bullet Feet

Model Number	Outside Diameter	Material	Weight Capacity	Shape
HWSS LEG 112	1-1/2"	Stainless steel	2000 lbs	Round
HWSS LEG SQ112	1-1/2"	Stainless steel	2000 lbs	Square
HWPLASTIC LEG	1-5/8"	Thermoplastic	200 lbs	Round
HWSS LEG 158	1-5/8"	Stainless steel	2000 lbs	Round
HWSS LEG 158 LR	** Optional Locking Ring for HWSS LEG 158 **			

Misc. sockets and brackets

Model Number	Description
HWJCN 516	5/16" Nut for creeper casters
FAGN505	3/4" Metal tooth wood socket
HW701	.625" Plastic socket for wash bucket
HW 48	7/16" Outside angle bracket
HW 52	7/16" Inside angle bracket
HW 81	7/16" Socket, flat bracket
HWBR038	Outside "C" Bracket. 11 Gauge, 3/8"nc tapped hole
HWBRC038	Outside Corner Bracket. 14 Gauge, 3/8"nc tapped hole
HWBRC0516	Outside Corner Bracket. 14 Gauge, 5/16"nc tapped hole



HWJCN 516



HWGN505



HW 48



HW 52

Heavy Duty

Looking for something that carries a little more weight?
Check out our Heavy-Duty caster catalogue for some **HEFTIER** options.



Policies & Warranty Information

Product

Our full line of bearings are manufactured by some of the leading manufacturers in the industry. In addition to the products listed in this catalog, many other products or special order items are available upon request. Please consult our order desk.

Limited Warranty: General Provisions

Caster Town warrants to the original purchaser of it's product that the product will be free from defects in material and workmanship for a period of 90 days after the date of delivery to the original purchaser.

This limited warranty is not effective with respect to products that are not properly installed or not used in the proper application based on loads, speeds and other factors. This warranty does not apply to products damaged or destroyed as a result of shipping.

Freight Policy

All goods ordered from this catalog are FOB our original purchase point warehouses and shipped via freight collect. Orders over \$500.00 may be eligible for a freight reduction of half the original freight cost to a major centre by a carrier of our choice. Any large orders or O.E.M. customers may be eligible for prepaid orders to a major centre by a carrier of our choice.

Pricing

Prices are subject to change without notice. Caster Town makes an effort to hold prices for a minimum of one year, however, occasionally circumstances arise which are beyond our control.

Terms

We accept Visa, MasterCard, American Express, Debit and net 30 days on approved credit.

First time orders may be subject to COD terms or a maximum charge amount depending on credit approval.

Hours of Operation




Caster Town is open from 8:00am to 5pm weekdays (Vancouver closes at 4:30pm). Please call the branch nearest you for applicable hours of operation.

Visit our webstore at www.castertown.com for application tips and 24 hour access to our products.






Visit us at one of our locations or at our web store
for our many excellent products to help keep you rolling.

www.castertown.com

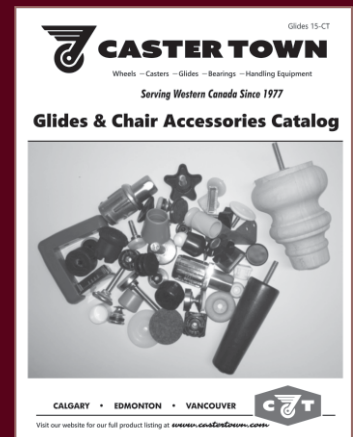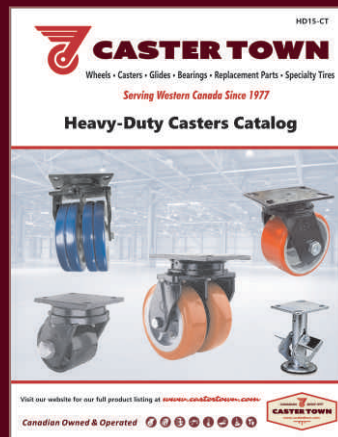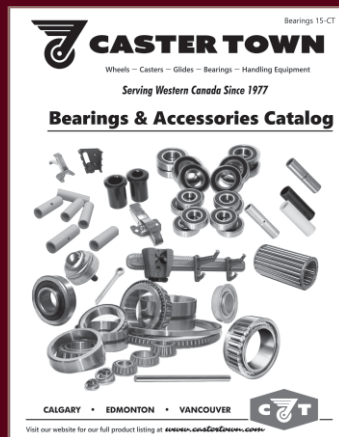

Our line up of catalogues to help you select the product you need!

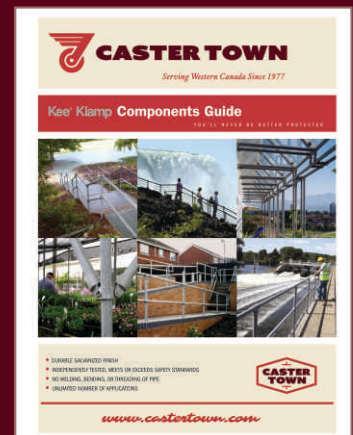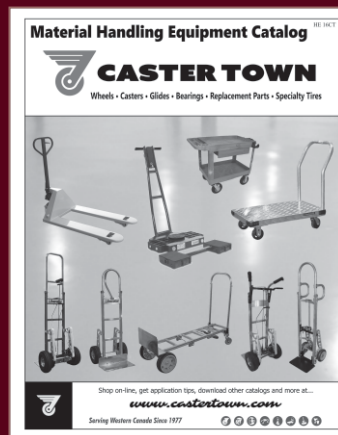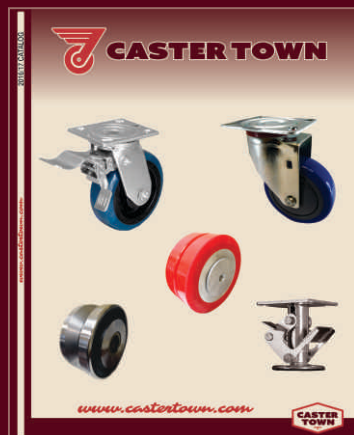

Our Store Locations...

EDMONTON

14219 Yellowhead Trail
Edmonton, AB T5L 3C4
Tel: 780-478-3486
Fax: 780-476-2306
Toll Free: 1-800-323-9886
Email: edmonton@castertown.com

CALGARY

22-5329 72 Avenue SE
Calgary, AB T2C 4X6
Tel: 403-236-0028
Fax: 403-279-8231
Toll Free: 1-800-665-1348
Email: calgary@castertown.com

VANCOUVER

1075 Clark Drive
Vancouver, BC V5L 3K2
Tel: 604-251-3151
Fax: 604-251-6233
Toll Free: 1-800-689-1441
Email: vancouver@castertown.com